



Trans-eyes series

The crystalloid video display solution for Commercial Ads

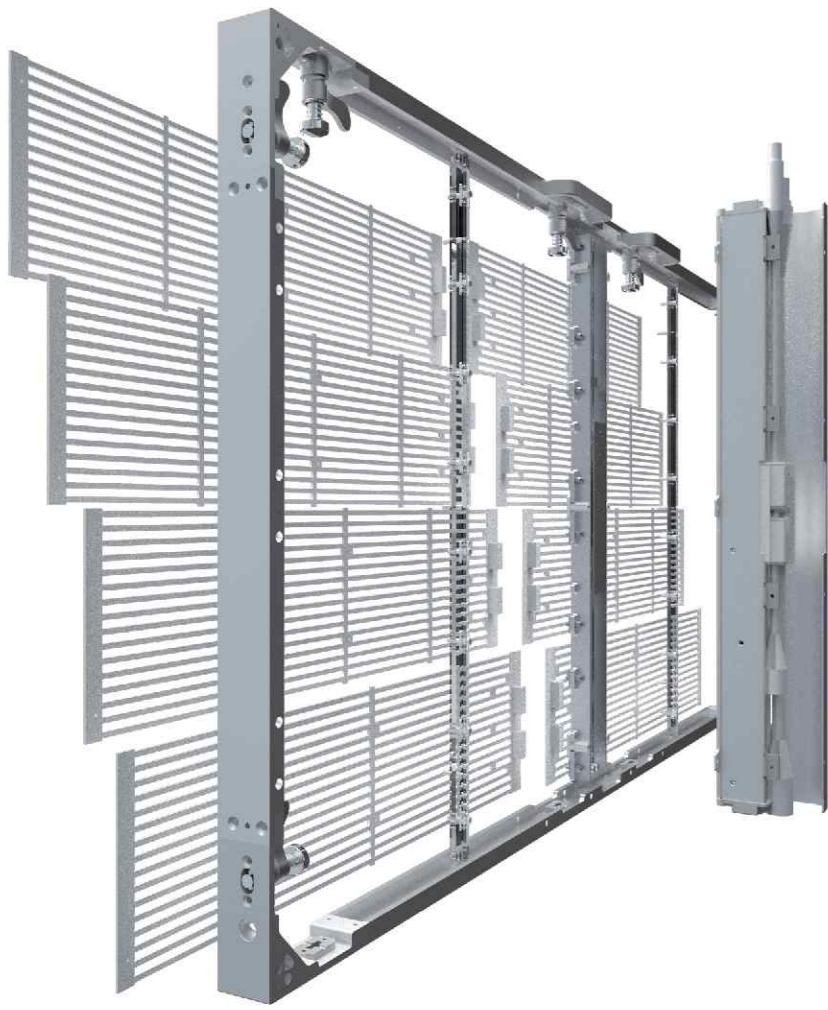

Ultra-light aluminum panel frame
Only 10kg/sq.m

Super-slim design
The screen part is only 35mm thick, and the controller part is 96mm thick

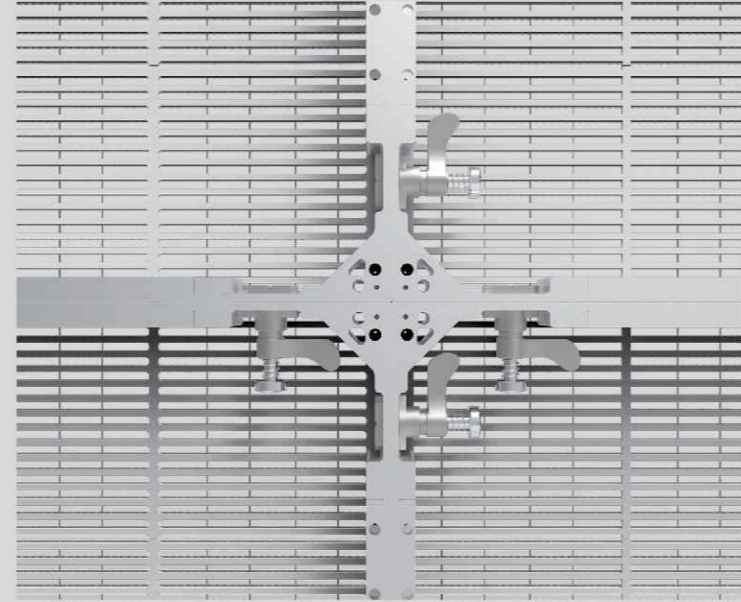

Quick lock system

Each panel contains 6 sets of lock, to ensure fast installation and good screen flatness

Good light transmission

The light transmission rate of screen can reach more than 60%

Groundbreaking transparent mask

While effectively protecting the lamp, make the screen body more crystalloid



Model	TS3	TS6	TS10
Pixel pitch	H3.91mm/V7.81mm	H6.94mm/V10.42mm	10.42mm
LED lamp	SMD1921	SMD2727	SMD2727
Operating environment	indoor		
Module size(mm)	L500x W125		
Panel size(mm)	L1000 x W500 x T96		
Panel weight(kg)	5.7	5	5
Viewing angle(°)	140		
Light transmission rate	60%	70%	73%
Pixel density(dot/sq.m)	32,768	13,824	9,216
Scan mode	1/8	1/4	1/3
Brightness(cd/sq.m)	3500	4500	4500
Refresh rate(Hz)	1920		
Gray scale(bit)	12		
Protection level	IP20		
Power consumption(W/sq.m)	600/200(Max./Ave.)		
Power input	100~240VAC/50~60Hz		
Operating temp./humidity(°C/RH)	-40~+60/10~90%		
Maintenance	Rear		

The wiring behind is perfectly hidden in the frame!

